




汤姆斯®

南京汤姆斯衡器有限公司
Nanjing Toms Weighing Instrument Co., Ltd.

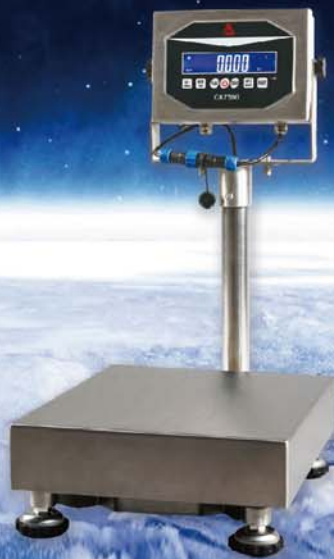

我们从事航空飞机动力学研究工作，致力于振动力学数据采集方面的研究长达二十多年，拥有丰富的航空领域技术和经验。

公司自创立以来，本着“以航空技术为基础，以品质制造者为目标”的理念，努力实践，勇于创新，建立了自有知识产权核心体系和完善的质量控制体系。

目前，公司专注于电子天平、计重计数天平（秤）、不锈钢防水天平（秤）、各种台秤和平台秤以及仪表产品的研发和生产，可提供全套工业称重和实验室计量的完整解决方案，已获得CE、ROHS、UL、OIML、NETP等多种国际组织认证。

We have been worked in research of aerodynamics and data acquisition of vibration mechanics on the field of military airplane for more than twenty years, and possessed abundant aeronautical technology and know-how of data acquisition on vibration mechanics of aircraft. We turn the aeronautical technology into civilian field of weighing instrument.

We have established our own intellectual property system and quality control system.

Toms sticks to providing and serving for each customer on balance, weighing and counting scale, waterproof scale with stainless steel, bench scale and indicators as well floor scale, can provide complete solution in the field of laboratory measurement and industry weighing, specially which have a variety of certificates as CE, UL, NTEP, OIML, ROHS, and so on.

我们是品质的制造者！ WE ARE MAKER OF QUALITY!



CONTENTS / 目录

01/02	行业应用 INDUSTRY APPLICATION	01	电子天平一览表、图标特点和符号 ELECTRONIC BALANCE LIST、ICON CHARACTERISTIC AND SYMBOL	03
04	航天精密天平 AEROSPACE PRECISE BALANCE	02		
	05 EXA			
	06/07 EXB			
	08 EXC			
	09 EXE			
	10 EXG			
		03		
			航空精准天平 AVIATION ACCURATE BALANCE	11
			STB 12	
			STC 13	
			STE 14	
15	航天分析天平 AEROSPACE ANALYTICAL BALANCE	04		
	16 EXJ			
		05		
			陆航电子秤 ARMY AVIATION SCALE	17
			SWT 18	
			SCT 19	
20	海航防水秤（PWT系列） NAVAL AVIATION WATERPROOF SCALE	06		
	21/22 PWT			
		07		
			海航/陆航电子台秤/平台秤 NAVAL/AMRY AVIATION PLATFORM/FLOOR SCALE	23
			TCS 24	
			TSS 25	
			TXQ 26	
			AK7190 27	
			CK7590 28	
			PTLS 29	
			PT1Q/PT1S/PT2Q/PT2S 30	
			PPQ/PPS 31	
32	陆航实用电子秤 ARMY AVIATION PRACTICAL SCALE	08		
	33 YA/YB			
	34 CF/GX			
		09		



制药业 Pharmacy Industry



EXA/EXJ

量程: 100~500g
最小显示: 0.0001~0.001g
Capacity: 100~500g
Readability: 0.0001~0.001g



EXG

量程: 10~30kg
最小显示: 0.05~0.1g
Capacity: 10~30kg
Readability: 0.05~0.1g



EXC

量程: 1~5kg
最小显示: 0.01g
Capacity: 1~5kg
Readability: 0.01g



食品业 Food Industry



TSS

量程: 30~300kg
最小显示: 1~100g
Capacity: 30~300kg
Readability: 1~100g



PTLS

量程: 1~10t
最小显示: 0.1~10kg
Capacity: 1~10t
Readability: 0.1~10kg



PWT

量程: 1.5~30kg
最小显示: 0.05~10g
Capacity: 1.5~30kg
Readability: 0.05~10g



化学工业 Chemical Industry




EXJ

量程: 120~220g
最小显示: 0.0001g
Capacity: 120~220g
Readability: 0.0001g




TSS

量程: 30~300kg
最小显示: 1~100g
Capacity: 30~300kg
Readability: 1~100g



PT1Q

量程: 1~10t
最小显示: 0.1~10kg
Capacity: 1~10t
Readability: 0.1~10kg



电子及半导体行业 Electronic and Semiconductor Industries



SWT

量程: 3~30kg
最小显示: 0.01~10g
Capacity: 3~30kg
Readability: 0.01~10g



SCT

量程: 3~30kg
最小显示: 0.01~10g
Capacity: 3~30kg
Readability: 0.01~10g



TCS

量程: 30~300kg
最小显示: 1~100g
Capacity: 30~300kg
Readability: 1~100g



珠宝行业 Jewelry Industry



EXA

量程: 100~500g
最小显示: 0.001g
Capacity: 100~500g
Readability: 0.001g



EXE

量程: 100~600g
最小显示: 0.01g
Capacity: 100~600g
Readability: 0.01g



EXB

量程: 100~2000g
最小显示: 0.01g
Capacity: 100~2000g
Readability: 0.01g



水产行业 Fishery Industry




PWT

量程: 1.5~30kg
最小显示: 0.05~10g
Capacity: 1.5~30kg
Readability: 0.05~10g



TSS

量程: 30~300kg
最小显示: 1~100g
Capacity: 30~300kg
Readability: 1~100g



PTLS

量程: 1~10t
最小显示: 0.1~10kg
Capacity: 1~10t
Readability: 0.1~10kg

电子天平一览表、图标特点和符号

Electronic balance list, Icon characteristic and Symbol

称量 Capacity	最小显示 Readability	0.1mg	0.001g	0.01g	0.1g
100g			TM-EXA1003H		
120g		TM-EXJ1204H			
200g			TM-EXA2003H		
220g		TM-EXJ2204H			
300g			TM-EXA3003H	TM-EXE3002S TM-STE3002S	
500g			TM-EXA5003H		
600g				TM-EXE6002S TM-STE6002S	
1000g				TM-STB10002S	
2000g				TM-EXB20002S TM-STB20002S	
3000g				TM-EXC30002	TM-STC30001
5000g				TM-EXC50002	
6000g					TM-STC60001
15000g					TM-EXG150001
30000g					TM-EXG300001

- 

易校准：一键校准，线性校准
Easy to calibration : one key calibration , lines calibration
- 

自动打印：连接串口设备，测定数据可自动打印输出
Auto Print : Connect a serial port equipment,Print the date automatically
- 

易计数：计数功能
Easy to count : count function
- 

模拟条形图显示
The bar chart shows
- 

机内时钟：天平有时间和日期功能
Built-in clock : Balance has time and date function
- 

电脑直通视窗：记录到Word,Excel,Txt等
Computer through the window : Log to Word ,Excel , Txt and so on
- 

内置RS232接口：可以连接打印机和电脑
Built-in RS232 : Connect to printer and computer
- 

LCD显示：蓝膜白字，大方清晰
LCD Display : STN LCD , B-STN , clear and easy
- 

置免维护铅酸电池，可连续工作50小时
Lead-acid battery without maintenance,work away of 50 hours
- 

LED显示：红色0.56寸字高
LED Display : red 0.56 inches high character
- 

下吊钩称重
The hook load
- 

动物秤功能
Animal scale function
- 

防水等级IP68
Waterproof grade IP68

航天精密天平

(AEROSPACE PRECISE BALANCE)



EXA 电子天平
EXA Electronic Balance



- 特点
- 机体由PC合金材料制成，稳固耐用
 - 秤盘采用不锈钢304制成，造型简约流畅
 - 大屏液晶显示，背光柔和，易于读取
 - 具有计数称重模式，简便容易操作
 - 设有g,ct,oz等21种国际常用质量单位
 - 全量程去皮功能
 - 配有超透明玻璃防风罩，保证称量精度
 - 无线、蓝牙传输功能 (选配)

Main features

- The body is made of PC alloy materials, hard and durably
- Pan is made of high quality stainless steel with SUS304,simply and fluency
- Large screen LCD display,backlight is soft and easy to read
- With the features of easy counting weighing mode,easy to operate
- Equipped with the unit g,ct,oz,etc.Total 21 kinds international units
- Full range taring function
- Wireless and bluetooth transmission (option)



天平的外形尺寸/重量:
292*218*227mm/3.1kg
Frame size/weight:
292*218*227mm/3.1kg

认证规格
Approved models



型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
EX300	300	0.05	±0.05	±0.05	Ø 118	≤2s
EX300H	300	0.005	±0.005	±0.005	Ø 118	≤2s

型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-EXA1003H	100	0.001	±0.002	±0.002	Ø 118	≤2s
TM-EXA2003H	200	0.001	±0.002	±0.002	Ø 118	≤2s
TM-EXA3003H	300	0.001	±0.002	±0.002	Ø 118	≤2s
TM-EXA5003H	500	0.001	±0.003	±0.003	Ø 118	≤3s

EXB 电子天平

EXB Electronic Balance

特点

- 机体由PC合金材料制成，稳固耐用
- 秤盘采用不锈钢304制成，造型简约流畅
- 大屏液晶显示，背光柔和，易于读取
- 具有计数称重模式，简便容易操作
- 设有g,ct,oz等21种国际常用质量单位
- 全量程去皮功能
- 标准的RS232输出功能，可连接打印机、电脑等设备
- 交直流两用，选配蓄电池，可充电使用
- 无线、蓝牙传输功能 (选配)



Main features

- The body is made of PC alloy materials, hard and durably
- Pan is made of high quality stainless steel with SUS304, simply and fluency
- Large screen LCD display, backlight is soft and easy to read
- With the features of easy counting weighing mode, easy to operate
- Equipped with the unit g, ct, oz, etc. Total 21 kinds international units
- Full range taring function
- Standard RS232 function, can connect with the printer, computer or others equipment
- AC/DC multiple function, rechargeable battery
- Wireless and bluetooth transmission (option)



认证规格

Approved models



型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
EX600	600	0.1	±0.1	±0.1	145*115*7	≤2s
EX600H	600	0.01	±0.01	±0.01	145*115*7	≤2s
EX1200	1200	0.2	±0.2	±0.2	145*115*7	≤2s
EX1200H	1200	0.02	±0.02	±0.02	145*115*7	≤2s
EX1500	1500	0.2	±0.2	±0.2	145*115*7	≤2s
EX1500H	1500	0.02	±0.02	±0.02	145*115*7	≤2s

型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-EXB1002S	100	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB2002S	200	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB3002S	300	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB4002S	400	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB5002S	500	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB6002S	600	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB10002S	1000	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB15002S	1500	0.01	±0.01	±0.01	145*115*7	≤2s
TM-EXB20002S	2000	0.01	±0.01	±0.01	145*115*7	≤2s

天平的外形尺寸/重量: 292*218*176mm/2.8kg

Frame size/weight:292*218*176mm/2.8kg

EXC 电子天平

EXC Electronic Balance

特点 (Translation: see page 09)

- 外形风格硬朗，时尚大方，动感强劲
- 机体由PC合金材料制成，稳固耐用
- 秤盘采用不锈钢304制成，造型简约流畅
- 大屏液晶显示，背光柔和，易于读取
- 开关人性化设计，反应速度快
- 具有计数称重模式，简便容易操作
- 全量程去皮功能
- 标准的RS232输出功能，可连接打印机、电脑等设备
- 交直流两用，选配蓄电池，可充电使用
- 设有g,ct,oz等21种国际常用质量单位
- 无线、蓝牙传输功能 (选配)



天平的外形尺寸/重量: 292*218*80mm/2.8kg

Frame size/weight: 292*218*80mm/2.8kg

认证规格

Approved models



型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
EX3000	3000	0.5	±0.5	±0.5	188*148*11	≤2s
EX3000H	3000	0.05	±0.05	±0.05	188*148*11	≤2s

型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-EXC10002	1000	0.01	±0.02	±0.02	188*148*11	≤2s
TM-EXC20002	2000	0.01	±0.02	±0.02	188*148*11	≤2s
TM-EXC30002	3000	0.01	±0.02	±0.02	188*148*11	≤2s
TM-EXC50002	5000	0.01	±0.02	±0.03	188*148*11	≤3s

EXE 电子天平

EXE Electronic Balance

Main features

- The body is made of PC alloy materials, hard and durably
- Pan is made of high quality stainless steel with SUS304,simply and fluency
- Large screen LCD display,backlight is soft and easy to read
- With the features of easy counting weighing mode,easy to operate
- Equipped with the unit g,ct,oz,etc.Total 21 kinds international units
- Full range taring function
- Standard RS232 function,can connect with the printer, computer or others equipment
- AC/DC multiple function,rechargeable battery
- Wireless and bluetooth transmission (option)



天平的外形尺寸/重量: 292*218*176mm/2.8kg

Frame size/weight:292*218*176mm/2.8kg



型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-EXE1002S	100	0.01	±0.01	±0.01	Ø 118	≤1s
TM-EXE2002S	200	0.01	±0.01	±0.01	Ø 118	≤1s
TM-EXE3002S	300	0.01	±0.01	±0.01	Ø 118	≤1s
TM-EXE4002S	400	0.01	±0.01	±0.01	Ø 118	≤1s
TM-EXE5002S	500	0.01	±0.01	±0.01	Ø 118	≤1s
TM-EXE6002S	600	0.01	±0.01	±0.01	Ø 118	≤1s

EXG 电子天平
EXG Electronic Balance

特点

- 机体由304材料制成，稳固耐用
- 秤盘采用不锈钢304制成，造型简约流畅
- 大屏液晶显示，背光柔和，易于读取
- 具有计数称重模式，简便容易操作
- 无线、蓝牙传输功能 (选配)

Main features

- The body is made of SUS304, hard and durably
- Pan is made of high quality stainless steel with SUS304,simply and fluency
- Large screen LCD display,backlight is soft and easy to rea
- With the features of easy counting weighing mode,easy to operate
- Wireless and bluetooth transmission (option)

天平的外形尺寸/重量:
390*330*90mm/7.5kg
Frame size/weight :
390*330*90mm/7.5kg



型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-EXG200001	20000	0.1	±0.2	±0.2	330*260*60	≤3s
TM-EXG300001	30000	0.1	±0.2	±0.2	330*260*60	≤3s
TM-EXG150001	15000	0.1	±0.2	±0.2	330*260*60	≤3s
TM-EXG150002	15000	0.05	±0.1	±0.1	330*260*60	≤3s



航空精准天平

(AVIATION ACCURATE BALANCE)





STB 电子天平

STB Electronic Balance

特点

- 机体由PC合金材料制成，稳固耐用
- 秤盘采用不锈钢304制成，造型简约流畅
- 大屏液晶显示，背光柔和，易于读取
- 具有计数称重模式，简便容易操作
- 有g,ct,oz等21种国际常用质量单位
- 全量程去皮功能
- 标准的RS232输出功能，可连接打印机、电脑等设备
- 交直流两用，选配蓄电池，可充电使用
- 无线、蓝牙传输功能(选配)



天平的外形尺寸/重量: 292*218*176mm/2.8kg

Frame size/weight: 292*218*176mm/2.8kg



Main features

- The body is made of PC alloy materials, hard and durably
- Pan is made of high quality stainless steel with SUS304, simply and fluency
- Large screen LCD display, backlight is soft and easy to read
- With the features of easy counting weighing mode, easy to operate
- Equipped with the unit g, ct, oz, etc. Total 21 kinds international units
- Full range taring function
- Standard RS232 function, can connect with the printer, computer or others equipment
- AC/DC multiple function, rechargeable battery
- Wireless and bluetooth transmission (option)

型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-STB1002S	100	0.01	±0.02	±0.02	145*115*7	≤1s
TM-STB2002S	200	0.01	±0.02	±0.02	145*115*7	≤1s
TM-STB3002S	300	0.01	±0.02	±0.02	145*115*7	≤1s
TM-STB4002S	400	0.01	±0.02	±0.02	145*115*7	≤1s
TM-STB5002S	500	0.01	±0.02	±0.02	145*115*7	≤1s
TM-STB6002S	600	0.01	±0.02	±0.02	145*115*7	≤1s
TM-STB10002S	1000	0.01	±0.02	±0.02	145*115*7	≤2s
TM-STB15002S	1500	0.01	±0.02	±0.02	145*115*7	≤2s
TM-STB20002S	2000	0.01	±0.03	±0.03	145*115*7	≤2s

STC 电子天平

STC Electronic Balance

特点 (Translation: see page 14)

- 机体由PC合金材料制成，稳固耐用
- 秤盘采用不锈钢304制成，造型简约流畅
- 大屏液晶显示，背光柔和，易于读取
- 具有计数称重模式，简便容易操作
- 无线、蓝牙传输功能（选配）
- 全量程去皮功能
- 标准的RS232输出功能，可连接打印机、电脑等设备
- 交直流两用，选配蓄电池，可充电使用
- 设有g,ct,oz等21种国际常用质量单位



天平的外形尺寸/重量: 292*218*80mm/2.8kg
Frame size/weight:292*218*80mm/2.8kg

型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-STC10001	1000	0.1	±0.2	±0.2	188*148*11	≤1s
TM-STC20001	2000	0.1	±0.2	±0.2	188*148*11	≤1s
TM-STC30001	3000	0.1	±0.2	±0.2	188*148*11	≤1s
TM-STC50001	5000	0.1	±0.2	±0.2	188*148*11	≤1s
TM-STC60001	6000	0.1	±0.2	±0.2	188*148*11	≤1s

金属水平泡，灵敏度高，确保称重的准确性
Metal gradienter with high sensitivity
ensure weighing accuracy



坚固耐用的电源接口:DC12V
Sturdy and durable power socket: DC12V

防盗装置，确保天平安全
Anti-theft device, ensure balance safety

RS232接口可连接打印机、
PC等串口通讯
RS232 connector to printer,
PC so on serial communications

STE 电子天平

STE Electronic Balance

Main features

- The body is made of PC alloy materials, hard and durably
- Pan is made of high quality stainless steel with SUS304,simply and fluency
- Large screen LCD display,backlight is soft and easy to read
- With the features of easy counting weighing mode,easy to operate
- Equipped with the unit g,ct,oz,etc.Total 21 kinds international units
- Full range taring function
- AC/DC multiple function,rechargeable battery
- Wireless and bluetooth transmission (option)



天平的外形尺寸/重量: 292*218*176mm/2.8kg

Frame size/weight:292*218*176mm/2.8kg

型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-STE1002S	100	0.01	±0.02	±0.02	Ø 118	≤1s
TM-STE2002S	200	0.01	±0.02	±0.02	Ø 118	≤1s
TM-STE3002S	300	0.01	±0.02	±0.02	Ø 118	≤1s
TM-STE4002S	400	0.01	±0.02	±0.02	Ø 118	≤1s
TM-STE5002S	500	0.01	±0.02	±0.02	Ø 118	≤1s
TM-STE6002S	600	0.01	±0.02	±0.02	Ø 118	≤1s



航天分析天平 (AEROSPACE ANALYTICAL BALANCE)



EXJ 电子天平

EXJ Electronic Balance



天平的外形尺寸/重量: 325*205*305mm/8kg

Frame size/weight: 325*205*305mm/8kg

Main features

- Electromagnetic sensor
- Operator-friendly ,direct weigh ,directly read the weighing result
- Highly smart , tare and back to zero within the whole weighing scope , overload display
- Multi-mode choice : counting ,percentage weigh
- With RS-232C interface, easy to connect with printer,computer and other output device
- LCD display, LED backlight

特点

- 高精度电磁力传感器
- 操作简单, 直接称量, 直接读取测量结果
- 高智能化, 可在全量程范围内去皮、清零, 超载显示
- 多称量模式选择: 计件、百分比
- 具有RS-232C接口, 用于与打印机, 计算机等外部设备相连接
- LCD显示, LED背光



型号 Item No.	称量范围 (g) Capacity (g)	可读精度 (g) Readability (g)	重复性 (g) Repeatability (g)	线性 (g) Linearity (g)	秤盘尺寸 (mm) Pan Size (mm)	响应时间 Response Time
TM-EXJ1204H	120	0.0001	±0.0003	±0.0003	Ø 90	≤3s
TM-EXJ2204H	220	0.0001	±0.0003	±0.0003	Ø 90	≤3s

陆航电子秤 (ARMY AVIATION SCALE)





陆航SWT电子计重秤 Army Aviation SWT Weighing Scale

- 超大LCD显示屏，字体俊逸苍劲，宝蓝背光剔透
Bigger LCD screen shown elegance and vigorous font, with diamond blue color
- 标配RS232连接电脑、打印机等，进行数据传输
With RS232 connected computer, printer, etc, for data transmission
- 便携，交直流可用，也可无电源使用
Portable, AC/DC and lead batteries
- 全量程去皮，累计等功能
The whole capacity tare and accumulation function, etc
- 无线、蓝牙传输功能（选配）
Wireless and bluetooth transmission (option)



超大LCD显示屏，字体俊逸苍劲，宝蓝背光剔透

Bigger LCD screen shown elegance and vigorous font, with diamond blue color



优质304不锈钢贴盘，简约流畅

The superior 304 stainless steel attached on pan for contracted and fluent



标配RS232接口，轻松实现数据传输

Interface humanized design and easy to dialogue with device

系列-型号 Series-Models	陆航-SWT Army Aviation-SWT			
最大秤量 (MAX) Max. Capacity	3kg	6kg	15kg	30kg
显示分度值 (d) Actual Interval (d)	0.01~1g	0.02~2g	0.05~5g	0.1~10g
检定分度值 (e) Verification Division (e)	1g	2g	5g	10g
最大显示分度 Max. Display Division	1:300000			
显示屏 Screen	HTN-LCD单窗，字高30mm，宝蓝色背光 HTN-LCD Single, Character Height 30mm, Diamond Blue Backlight			
标定方式 Calibration	兼内外标定，砝码选配 Internal and External Calibration, Weights Selected			
稳定时间 Stable Time	精度10W以下：≤1秒，以上：≤2秒 Under 10W Accuracy: ≤1s and over: ≤2s			
过载能力 Overload Capacity	150%满载 150% Whole Capacity			
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries			
秤盘尺寸 (长*宽) Pan Size (Length*Width)	285*220mm			
外型尺寸 (长*宽*高) External Size (length*Width*Height)	310*340*125mm			
工作环境 Working Temperature	-10°C到40°C -10°C to 40°C			
净重 Net Weight	约3.7kg Approximate 3.7kg			



陆航SCT电子计数秤
Army Aviation SCT Counting Scale

- 三块LCD显示屏，字体俊逸苍劲，宝蓝背光剔透
3 LCD screens shown elegance and vigorous font, with diamond blue color
- 标配RS232连接电脑、打印机等，进行数据传输
With RS232 connected computer, printer, etc , for data transmission
- 便携，交直流可用，也可无电源使用
Portable, AC/DC and lead batteries
- 全量程去皮，累计等功能
The whole capacity tare and accumulation function, etc
- 无线、蓝牙传输功能（选配）
Wireless and bluetooth transmission (option)



三块LCD显示屏，字体俊逸苍劲，宝蓝背光剔透

3 LCD screens shown elegance and vigorous font, with diamond blue color



优质304不锈钢贴盘，简约流畅

The superior 304 stainless steel attached on pan for contracted and fluent



标配RS232接口，轻松实现数据传输

Interface humanized design and easy to dialogue with device

系列-型号 Series-Models	陆航-SCT Army Aviation-SCT			
最大称量 (MAX) Max. Capacity	3kg	6kg	15kg	30kg
显示分度值 (d) Actual Interval (d)	0.01~1g	0.02~2g	0.05~5g	0.1~10g
检定分度值 (e) Verification Division (e)	1g	2g	5g	10g
最大显示分度 Max. Display Division	1:300000			
显示屏 Screen	HTN-LCD三窗，字高20mm，宝蓝色背光 HTN-LCD Three Screens, Character Height 20mm, Diamond Blue Backlight			
标定方式 Calibration	兼内外标定，砝码选配 Internal and External Calibration, Weights Selected			
稳定时间 Stable Time	精度10W以下：≤1秒，以上：≤2秒 Under 10W Accuracy: ≤1s and over: ≤2s			
过载能力 Overload Capacity	150%满载 150% Whole Capacity			
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries			
秤盘尺寸 (长*宽) Pan Size (Length*Width)	285*220mm			
外型尺寸 (长*宽*高) External Size (length*Width*Height)	310*340*125mm			
工作环境 Working Temperature	-10°C到40°C -10°C to 40°C			
净重 Net Weight	约3.7kg Approximate 3.7kg			

海航防水秤 (PWT系列)

NAVAL AVIATION WATERPROOF SCALE



海航防水秤 (PWT系列)

NAVAL AVIATION WATERPROOF SCALE



特点

- 防水等级IP68
- 不锈钢304外壳，表面硬化，易清洗
- 防水按键设计，提高使用寿命
- 完全密封的主板设计，防止湿气影响
- 传感器使用密封型保护套，结构件经防腐蚀处理
- 可选配双面显示
- 高亮的红色数码管显示，适用于超低温环境下使用
- 防滑抗震的调整脚设计，清晰易调的水平指示调节
- 全量程去皮，带有计数功能，动物秤功能，上下限报警功能
- 省电模式，自动关机，提高电池寿命，电池工作时间120小时
- 非常适合在潮湿环境下使用，如：食品加工厂，水产市场等环境下使用

Main features

- A truly waterproof scale with IP68
- Best 304 Stainless Steel Housing
- Water-proof mechanical Keyboard
- All sealed PCB design
- Complete sealed design with ventilated ring for Load Cell
- Double display
- Easy-to-read backlight LED display
- Adjustable feet and level indicator
- Full range tare , parts counting , animal scale function , upper and lower alarm function
- Auto power off timing selection
- Ideal for applications including high humidity surrounding of food or seafood markets , food processing factories , delicatessens or any other use



表格一 (Model 1)



型号 Model	量程 Capacity(kg)	秤盘尺寸 Platform size	检定分度值 e(g)	实际分度值 d(g)	分度值 n _{max}	准确等级 Class
PWT-3k-M	3kg	225x185mm	1g	1g	3000	III
PWT-6k-M	6kg	225x185mm	2g	2g	3000	III
PWT-15k-M	15kg	225x185mm	5g	5g	3000	III
PWT-30k-M	30kg	225x185mm	10g	10g	3000	III
PWT-3k-MR	1.5/3kg	225x185mm	0.5/1g	0.5/1g	3000/3000	III
PWT-6k-MR	3/6kg	225x185mm	1/2g	1/2g	3000/3000	III
PWT-15k-MR	6/15kg	225x185mm	2/5g	2/5g	3000/3000	III
PWT-30k-MR	15/30kg	225x185mm	5/10g	5/10g	3000/3000	III

表格二 (Model 2)

型号 Model	量程 Capacity(kg)	秤盘尺寸 Platform size	检定分度值 e(g)	实际分度值 d(g)	分度值 n _{max}	准确等级 Class
PWT-1.5k05	1.5kg	225x185mm	0.5g	0.5g	3000	III
PWT-3k1	3kg	225x185mm	1g	1g	3000	III
PWT-6k2	6kg	225x185mm	2g	2g	3000	III
PWT-15k5	15kg	225x185mm	5g	5g	3000	III
PWT-30k10	30kg	225x185mm	10g	10g	3000	III
PWT-1.5k02	1.5kg	225x185mm	0.5g	0.2g	7500	III
PWT-3k05	3kg	225x185mm	1g	0.5g	6000	III
PWT-6k1	6kg	225x185mm	2g	1g	6000	III
PWT-15k2	15kg	225x185mm	5g	2g	7500	III
PWT-30k5	30kg	225x185mm	10g	5g	6000	III
PWT-1.5k01	1.5kg	225x185mm	0.5g	0.1g	15000	III
PWT-3k02	3kg	225x185mm	1g	0.2g	15000	III
PWT-6k05	6kg	225x185mm	2g	0.5g	12000	III
PWT-15k1	15kg	225x185mm	5g	1g	15000	III
PWT-30k2	30kg	225x185mm	10g	2g	15000	III
PWT-1.5k005	1.5kg	225x185mm	0.5g	0.05g	30000	III
PWT-3k01	3kg	225x185mm	1g	0.1g	30000	III
PWT-6k02	6kg	225x185mm	2g	0.2g	30000	III
PWT-15k05	15kg	225x185mm	5g	0.5g	30000	III
PWT-30k1	30kg	225x185mm	10g	1g	30000	III

海航/陆航电子台秤 /平台秤

(NAVAL/AMRY AVIATION PLATFORM/FLOOR SCALE)





陆航TCS台秤

- 分辨率高达：1:6000-1:30000
- 加强型碳钢秤体，304不锈钢加厚型台面
- 配航空技术仪表，超大LCD显示屏，字体俊逸苍劲，宝蓝背光剔透
- 交直流两用，内置免维护铅酸电池，方便客户移动使用
- 人性化操作界面：六键设计，方便人机对话
- 标配RS232连接电脑、打印机等设备，进行数据传输
- 多种应用模式：称重模式，计数模式，累计模式
- 无线、蓝牙、WIFI传输功能（选配）

Army Aviation TCS Platform Scale

- The resolution ratio reach up to: 1:6000-1:30000
- Reinforced carbon steel body and heavy 304 stainless steel pan
- With aeronautical indicator, bigger LCD screen shown elegance and vigorous font, with diamond blue color
- AC/DC and lead batteries inside as to work the places after moving
- Interface humanized design of six keys and easy to dialogue with device
- With RS232 connected computer, printer, etc , for data transmission
- Functions: weighing, counting, accumulation, etc
- Wireless , bluetooth, WIFI transmission (option)



系列-型号 Series-Models	陆航-TCS Army Aviation-TCS		
台面尺寸 Platform Size	303*403mm	403*503mm	503*603mm
最大称量 Max. Capacity	30~60kg	100~150kg	200~300kg
显示分度值 Actual Interval	1~20g	1~50g	10~100g
显示屏 Display Screen	23mm字高，蓝色LCD显示 Character Height 23mm, Diamond Blue LCD Display		
稳定时间 Stable Time	1秒 1s		
过载能力 Overload Capacity	150%满载 150% Whole Capacity		
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries		
电池续航时间 Battery Life	持续充电12小时，可连续使用50小时 Work for 50 hours continuously after persistently recharging 12 hours		
标定方式 Calibration	任一点标定（建议三分之一满载以上） One Point Calibration(Over 1/3 Capacity As An Advice)		
通信接口 Connector	RS232(可转USB,485)		
工作环境 Working Temperature	-10到40°C -10°C to 40°C		
传感器 Load Cell	铝制传感器，防护等级IP65 Aluminum Sensor, Protection Class IP65		
净重 Net Weight	13.5kg	18.2kg	32.3kg



海航TSS防水台秤

- 分辨率高达：1:6000-1:30000
- 加强X型304不锈钢秤体和加厚秤盘
- 配航空技术仪表，超大LCD显示屏，字体俊逸苍劲，宝蓝背光剔透
- 交直流两用，内置免维护铅酸电池，方便客户移动使用
- 人性化操作界面：六键设计，方便人机对话
- 选配RS232连接电脑、打印机等设备，进行数据传输
- 多种应用模式：称重模式，计数模式，累计模式
- 无线、蓝牙、WIFI传输功能（选配）

Naval Aviation TSS Waterproof Platform Scale

- The resolution ratio reach up to: 1:6000-1:30000
- Reinforced X 304 stainless steel body and heavy pan
- With aeronautical indicator, bigger LCD screen shown elegance and vigorous font, with diamond blue color
- AC/DC and lead batteries inside as to work the places after moving
- Interface humanized design of six keys and easy to dialogue with device
- With RS232 connected computer, printer, etc , for data transmission
- Functions: weighing, counting, accumulation, etc
- Wireless 、 bluetooth、 WIFI transmission (option)



系列-型号 Series-Models	海航-TSS Naval Aviation-TSS		
台面尺寸 Platform Size	303*403mm	403*503mm	503*603mm
最大称量 Max. Capacity	30~60kg	100~150kg	200~300kg
显示分度值 Actual Interval	1~20g	1~50g	10~100g
显示屏 Display Screen	23mm字高，蓝色LCD显示 Character Height 23mm, Diamond Blue LCD Display		
稳定时间 Stable Time	1秒 1s		
过载能力 Overload Capacity	150%满载 150% Whole Capacity		
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries		
电池续航时间 Battery Life	持续充电12小时，可连续使用50小时 Work for 50 hours continuously after persistently recharging 12 hours		
标定方式 Calibration	任一点标定（建议三分之一满载以上） One Point Calibration(Over 1/3 Capacity As An Advice)		
通信接口 Connector	RS232（选配） RS232(Optional)		
工作环境 Working Temperature	-10到40°C -10°C to 40°C		
传感器 Load Cell	铝制传感器，防护等级IP65 Aluminum Sensor, Protection Class IP65		
净重 Net Weight	12.1kg	16.1kg	30.3kg



陆航TXQ卧式台秤

- 分辨率高达: 1:6000-1:30000
- 加强型碳钢秤体, 304不锈钢加厚型台面
- 配航空技术仪表, 超大LCD显示屏
- 交直流两用, 内置免维护铅酸电池, 方便客户移动使用
- 人性化操作界面: 六键设计, 方便人机对话
- 标配RS232连接电脑、打印机等设备, 进行数据传输
- 多种应用模式: 称重模式, 计数模式, 累计模式
- 遥控、无线、蓝牙、WIFI传输 (选配)

Army Aviation TXQ Platform Scale

- The resolution ratio reach up to: 1:6000-1:30000
- Reinforced carbon steel body and heavy 304 stainless steel pan
- With aeronautical indicator, bigger LCD screen
- AC/DC and lead batteries inside as to work the places after moving
- Interface humanized design of six keys and easy to dialogue with device
- With RS232 connected computer, printer, etc , for data transmission (Option)
- Functions: weighing, counting, accumulation, etc
- Remote control、wireless、bluetooth、WIFI transmission (option)



系列-型号 Series-Models	陆航-TXQ Army Aviation-TXQ	
台面尺寸 Platform Size	303*403mm	403*503mm
最大称量 Max. Capacity	30~60kg	100~150kg
显示分度值 Actual Interval	1~20g	1~50g
显示屏 Display Screen	23mm字高, 蓝色LCD显示 Character Height 23mm, Diamond Blue LCD Display	
稳定时间 Stable Time	1秒 1s	
过载能力 Overload Capacity	150%满载 150% Whole Capacity	
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries	
电池续航时间 Battery Life	持续充电12小时, 可连续使用50小时 Work for 50 hours continuously after persistently recharging 12 hours	
标定方式 Calibration	任一点标定 (建议三分之一满载以上) One Point Calibration(Over 1/3 Capacity As An Advice)	
通信接口 Connector	RS232(可转USB,485)	
工作环境 Working Temperature	-10到40°C -10°C to 40°C	
传感器 Load Cell	铝制传感器, 防护等级IP65 Aluminum Sensor, Protection Class IP65	
净重 Net Weight	13.5kg	18.2kg



陆航AK7190航空计重仪表
Army Aviation AK7190 Aeronautical Weighing Indicator

- 最大显示分度数可达300000
The Maximum Number of Division reach up to 300000
- 航空技术设计，LCD显示屏
Aeronautical design, LCD display screen
- 交直流两用，内置免维护铅酸电池，方便客户移动使用
AC/DC and lead batteries inside as to work the places after moving
- 人性化操作界面：六键设计，方便人机对话
Interface humanized design of six keys and easy to dialogue with device
- 标配RS232、另无线、蓝牙、WIFI（选配）连接电脑、打印机等设备,进行数据传输
With RS232,but wireless ,bluetooth,WIFI (Option) connected computer, printer, etc , for data transmission
- 多种应用模式：称重模式，计数模式，累计模式
Functions: weighing, counting, accumulation, etc



航空技术设计，LCD显示屏，字体俊逸苍劲，宝蓝背光剔透
Aeronautical design, LCD display screen shown elegance and vigorous font, with diamond blue color



标配RS232连接电脑、打印机等设备，进行数据传输
With RS232 connected computer, printer, etc , for data transmission



多种不同类型秤体可供客户选择，满足多种场合的需要
Match with many kinds of body to meet various places

系列-型号 Series-Models	陆航-AK7190 Army Aviation-AK7190
最大显示分度数 Max. Number of Division	300000
称重模式 Modes	称重、计数、累加 Weighing, Counting, Accumulation
传感器激励电压 Excitation Voltage	5V DC
仪表驱动能力 Drive Ability	最多4颗350Ω传感器 At Most 4 pieces 350Ω sensors
稳定时间 Stable Time	1秒 1s
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries
电池续航时间 Battery Life	持续充电12小时，可连续使用50小时 Work for 50 hours continuously after persistently recharging 12 hours
外形尺寸（宽*长*高） External Size (Width*Length*Height)	170*230*65mm
净重 Net Weight	0.98kg



海航CK7590不锈钢防水仪表

Naval Aviation CK7590 Aeronautical Waterproof Indicator

- 全不锈钢304外壳,防水等级IP65
The housing is completely made of SUS304 stainless steel with IP65
- 航空技术设计, LCD显示屏
Aeronautical design, LCD display screen
交直流两用,内置免维护铅酸电池,方便客户移动使用
- AC/DC and lead batteries inside as to work the places after moving
人性化操作界面:六键设计,方便人机对话
- Interface humanized design of six keys and easy to dialogue with device
- RS232、无线、蓝牙、WIFI连接电脑、打印机等设备,进行数据传输
(选配)
With RS232,wireless,bluetooth,WIFI connected computer, printer, etc , for data transmission (Option)
- 多种应用模式: 称重模式, 计数模式, 累计模式
Functions: weighing, counting, accumulation, etc



航空技术设计, LCD显示屏, 字体俊逸苍劲, 宝蓝背光剔透

Aeronautical design, LCD display screen shown elegance and vigorous font, with diamond blue color



选配RS232连接电脑、打印机等设备, 进行数据传输

With RS232 connected computer, printer, etc , for data transmission (Option)



IP68防水接头, 可用于恶劣环境, 拆接方便

IP68 connector works in hostile environment, is easy to be connected

系列-型号 Series-Models	海航-CK7590 Naval Aviation-CK7590
最大显示分度数 Max. Number of Division	300000
称重模式 Modes	称重、计数、累加 Weighing, Counting, Accumulation
传感器激励电压 Excitation Voltage	5V DC
仪表驱动能力 Drive Ability	最多4颗350Ω传感器 At Most 4 pieces 350Ω sensors
稳定时间 Stable Time	1秒 1s
电源 Power	AC100~240V, DC12V1A, 可充电铅酸蓄电池 AC100~240V, DC12V1A, Rechargeable Batteries
电池续航时间 Battery Life	持续充电12小时, 可连续使用50小时 Work for 50 hours continuously after persistently recharging 12 hours
外形尺寸 (宽*长*高) External Size (Width*Length*Height)	120*210*70mm
净重 Net Weight	2.2kg



海航防水平台秤
Naval Aviation Waterproof Floor Scale


- 超低台面，带双引坡设计，方便客户推车称重
Ultrathin deck with double approach ramp, easy to pull cart
- 碳钢，不锈钢材料可供选择
Carbon steel and stainless steel platform can be selected
- 配高精度塑料或不锈钢航空仪表
With aeronautical indicator(Plastic or Stainless steel housing), bigger LCD screen
- 台面多种可供选择，适应各种场所
Many kinds of deck to select for different working place
- 仪表电缆长度可达5米
Cable length of indicator approx.5m
- 仪表内装充电电池，工作时间达50小时，充电时间12小时
Rechargeable battery pack internal, operating time up to 50 h , charging time approx. 12 h
- 遥控、无线、蓝牙、WIFI传输（选配）
Remote control, wireless, bluetooth, WIFI transmission (option)



超薄平台秤 Ultrathin floor scale

系列-型号Series-Models		精度 Accuracy	称量 Capacity	感量 Division	台面 Dimension
MS碳钢(Carton Steel)	SS不锈钢(Stainless Steel)				
PTLQ-0808-1.5	PTLS-0808-1.5	3000/6000/7500	1500kg	0.5/0.2kg	800*800
PTLQ-1010-1.5	PTLS-1010-1.5		1500kg	0.5/0.2kg	1000*1000
PTLQ-1010-3	PTLS-1010-3		3000kg	1/0.5kg	1000*1000
PTLQ-1212-1.5	PTLS-1212-1.5		1500kg	0.5/0.2kg	1200*1200
PTLQ-1215-3	PTLS-1215-3		3000kg	1/0.5kg	1200*1500
PTLQ-1515-3	PTLS-1515-3		3000kg	1/0.5kg	1500*1500
PTLQ-2020-3			3000kg	1/0.5kg	2000*2000



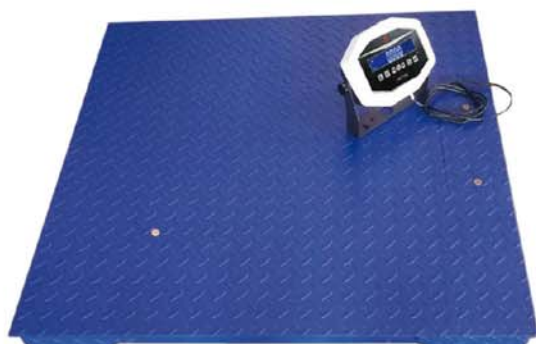

陆航平台秤 Army Aviation Floor Scale

- 单层, 双层类型可供选择, 结构坚固
Single/double-deck style platform can be selected, strong structure
- 碳钢, 不锈钢材料可供选择
Carbon steel and stainless steel can be selected
- 配高精度塑料或不锈钢航空仪表
With aeronautical indicator(Plastic or Stainless steel housing), bigger LCD screen
- 台面多种可供选择, 适应各种场所
Many kinds of deck to select for different working place
- 仪表电缆长度可达5米
Cable length of indicator approx.5m
- 仪表内装充电电池, 工作时间达50小时, 充电时间12小时
Rechargeable battery pack internal, operating time up to 50 h , charging time approx. 12 h
- 遥控、无线、蓝牙、WIFI传输 (选配)
Remote control, wireless, bluetooth, WIFI transmission (option)

单层平台秤 Single Floor scale

系列-型号Series-Models		精度 Accuracy	称量 Capacity	感量 Division	台面 Dimension
MS碳钢(Carbon Steel)	SS不锈钢(Stainless Steel)				
PT1Q-0808-1.5	PT1S-0808-1.5	3000/6000/7500	1500kg	0.5/0.2kg	800*800
PT1Q-1010-1.5	PT1S-1010-1.5		1500kg	0.5/0.2kg	1000*1000
PT1Q-1010-3	PT1S-1010-3		3000kg	1/0.5kg	1000*1000
PT1Q-1212-1.5	PT1S-1212-1.5		1500kg	0.5/0.2kg	1200*1200
PT1Q-1215-3	PT1S-1215-3		3000kg	1/0.5kg	1200*1500
PT1Q-1515-3	PT1S-1515-3		3000kg	1/0.5kg	1500*1500
PT1Q-1515-6	PT1S-1515-6		6000kg	1/2kg	1500*1500
PT1Q-2020-6	PT1S-2020-6		6000kg	1/2kg	2000*2000
PT1Q-1520-6	PT1S-1520-6		6000kg	1/2kg	1500*2000
PT1Q-2020-10	PT1S-2020-10	2000/5000	10000kg	5/2kg	2000*2000

双层平台秤 Double Floor scale

系列-型号Series-Models		精度 Accuracy	称量 Capacity	感量 Division	台面 Dimension
MS碳钢(Carbon Steel)	SS不锈钢(Stainless Steel)				
PT2Q-0808-1.5	PT2S-0808-1.5	3000/6000/7500	1500kg	0.5/0.2kg	800*800
PT2Q-1010-1.5	PT2S-1010-1.5		1500kg	0.5/0.2kg	1000*1000
PT2Q-1010-3	PT2S-1010-3		3000kg	1/0.5kg	1000*1000
PT2Q-1212-1.5	PT2S-1212-1.5		1500kg	0.5/0.2kg	1200*1200
PT2Q-1215-3	PT2S-1215-3		3000kg	1/0.5kg	1200*1500
PT2Q-1515-3	PT2S-1515-3		3000kg	1/0.5kg	1500*1500
PT2Q-1515-6	PT2S-1515-6		6000kg	1/2kg	1500*1500
PT2Q-2020-6	PT2S-2020-6		6000kg	1/2kg	2000*2000
PT2Q-1520-6	PT2S-1520-6		6000kg	1/2kg	1500*2000
PT2Q-2020-10	PT2S-2020-10	2000/5000	10000kg	5/2kg	2000*2000



叉车秤

- 配高精度塑料或不锈钢航空仪表
- 稳定可靠的机械结构和强力液压系统，坚固耐用
- 载叉防护装置，保证重载叉运货物
- 宽叉和窄叉两种形式可供选择
- 转角范围：206°
- 钢圈轮毂外包硬橡胶胎，移动自如
- 遥控、无线、蓝牙、WIFI传输（选配）

Forklift Truck Scale

- With aeronautical indicator(Plastic or Stainless steel housing), bigger LCD
- Compact construction and brute force hydraulic system
- Protective device make heavy load move easily
- Wide and narrow fork can be selected
- Pivot range: 206°
- Solid rubber on steel rims
- Remote control, wireless, bluetooth, WIFI transmission (option)



系列-型号Series-Models		精度	称量	感量	台面
MS碳钢(Carton Steel)	SS不锈钢(Stainless Steel)	Accuracy	Capacity	Division	Dimension
PPQ-540C-1.5	PPS-540C-1.5	3000	1500kg	0.5kg	1150*540
PPQ-690C-3	PPS-690C-3		3000kg	1kg	1150*690
PPQ-540U-2	PPS-540U-2	2000	2000kg	1kg	1150*540
PPQ-690U-2	PPS-690U-2		2000kg	1kg	1150*690

陆航实用电子秤

(ARMY AVIATION PRACTICAL SCALE)





邮包秤YA系列

- 压铸铝结构，坚固耐用
- 多单位可选使用
- 自动省电，替换电池方便
- 显示清晰易读
- U型架结构，多角度调节，摆放任意

Postal Scale YA Series

- Die-cast aluminum structure, strong and durable
- Multiple units are optional
- Automatic power saving, easy to replace batteries
- Display is clear and easy to read
- U support is adjustable to put freely

型号 Item No.	称量范围 (kg) Capacity(kg)	可读精度 (g) Readability(g)	重复性 (g) Repeatability(g)	线性 (g) Linearity(g)	秤盘尺寸 (mm) Pan Size(mm)	响应时间 Response Time
YA35K10	35	10	±20	±20	400*400	≤2s
YA75K10	75	10	±20	±20	400*400	≤2s
YA200K100	100	100	±100	±100	400*400	≤2s



邮包秤YB系列

- 不锈钢表面，易清理
- 多单位可选使用
- 自动省电，替换电池方便
- 显示清晰易读

Postal Scale YB Series

- Pan is made of stainless steel and easy to clean surface
- Multiple units are optional
- Automatic power saving, easy to replace batteries
- Display is clear and easy to read

型号 Item No.	称量范围 (kg) Capacity(kg)	可读精度 (g) Readability(g)	重复性 (g) Repeatability(g)	线性 (g) Linearity(g)	秤盘尺寸 (mm) Pan Size(mm)	响应时间 Response Time
YB35K50	35	50	±50	±50	390*300	≤2s
YB75K50	75	50	±50	±50	390*300	≤2s
YB200K100	100	100	±100	±100	390*300	≤2s



厨房/烘培秤CF

- 超大圆盘直径160mm
- 多单位可选使用
- 自动省电, 替换电池方便
- 显示清晰易读

Kitchen /Baking Scale

- Bigger round pan: $\Phi 160\text{mm}$
- Multiple units are optional
- Automatic power saving, easy to replace batteries
- Display is clear and easy to read



型号 Item No.	称量范围 (g) Capacity(g)	可读精度 (g) Readability(g)	重复性 (g) Repeatability(g)	线性 (g) Linearity(g)	秤盘尺寸 (mm) Pan Size(mm)	响应时间 Response Time
CF6001	600	0.1	± 0.2	± 0.2	$\Phi 160\text{mm}$	$\leq 2\text{s}$
CF30001	3000	0.1	± 0.2	± 0.2	$\Phi 160\text{mm}$	$\leq 2\text{s}$
CF50001	5000	0.1	± 0.2	± 0.2	$\Phi 160\text{mm}$	$\leq 2\text{s}$
CF5000	5000	1	± 2	± 2	$\Phi 160\text{mm}$	$\leq 2\text{s}$
CF10000	10000	1	± 2	± 2	$\Phi 160\text{mm}$	$\leq 2\text{s}$

教学天平GX



- 不锈钢圆盘方盘, 多种选择
- 多单位可选使用, 适用教育
- 自动省电, 替换电池方便
- 显示清晰易读
- 圆盘可选配圆罩

Education Balance

- Round or square pan is made of stainless steel and optional
- Multiple units are optional to apply in education
- Automatic power saving, easy to replace batteries
- Display is clear and easy to read
- Plastic windshield is optional to round pan



型号 Item No.	称量范围 (g) Capacity(g)	可读精度 (g) Readability(g)	重复性 (g) Repeatability(g)	线性 (g) Linearity(g)	秤盘尺寸 (mm) Pan Size(mm)	响应时间 Response Time
GX3002	300	0.01	± 0.02	± 0.02	$\Phi 106$	$\leq 2\text{s}$
GX6002	600	0.01	± 0.02	± 0.02	$\Phi 106$	$\leq 2\text{s}$
GX30001	3000	0.1	± 0.2	± 0.2	120*120	$\leq 2\text{s}$

打印机 Printers



E1, E2, F1, F2, M1 等级砝码

E1, E2, F1, F2, M1 weights





汤姆斯®

我们是品质的制造者！

WE ARE MAKER OF QUALITY



南京汤姆斯衡器有限公司

地址：江苏省南京市江宁区麒麟门宝山路77号

邮编：211135 传真：025 84121983

电话：025 52367380 , 84121983

E-mail: sales-scale@toms168.com

网站：www.toms168.com

NANJING TOMS WEIGHING INSTRUMENT CO., LTD.

Add.: No.77 Baoshan road , Qilin , Nanjing, China

P.C.: 211135

Tel.: +86 25 52367380 Fax.: +86 25 84121983

E-mail: sales-scale@toms168.com

Web: www.toms168.com

注：此样品的信息如有变动恕不另行通知